

For
Small
Business



Cisco RV120W Wireless-N VPN Firewall

Take Basic Connectivity to a New Level

The Cisco® RV120W Wireless-N VPN Firewall combines highly secure connectivity – to the Internet as well as from other locations and remote workers – with a high-speed, 802.11n wireless access point, a 4-port switch, an intuitive, browser-based device manager, and support for the Cisco FindIT Network Discovery Utility, all at a very affordable price. Its combination of high performance, business-class features and top-quality user experience takes basic connectivity to a new level (Figure 1).

Figure 1. Cisco RV120W Wireless-N VPN Firewall



Product Overview

The Cisco RV120W Wireless-N VPN Firewall features:


- High-speed, standards-based 802.11n wireless connectivity to help employees stay productive while away from their desks
- Integrated 4-port 10/100 switch with quality of service (QoS) support for enhanced voice, video and data traffic
- Support for separate “virtual” networks enables you to control access to sensitive information and to set up highly secure wireless guest access
- IP Security (IPsec) VPN support with hardware acceleration to deliver highly secure, high-performance connections to multiple locations and traveling employees
- Support for static routing, Routing Information Protocol (RIP) versions 1 and 2, and inter-VLAN routing to enable flexible connection sharing
- Proven stateful packet inspection (SPI) firewall, plus advanced wireless security to help keep business assets safe
- Simplified configuration through an intuitive, browser-based device manager
- Support for the Cisco FindIT Network Discovery Utility

Figure 2 shows back panel of the Cisco RV120W. Figure 3 shows a typical configuration using the firewall.

Figure 2. Back Panel of the Cisco RV120W



Figure 3. Typical Configuration

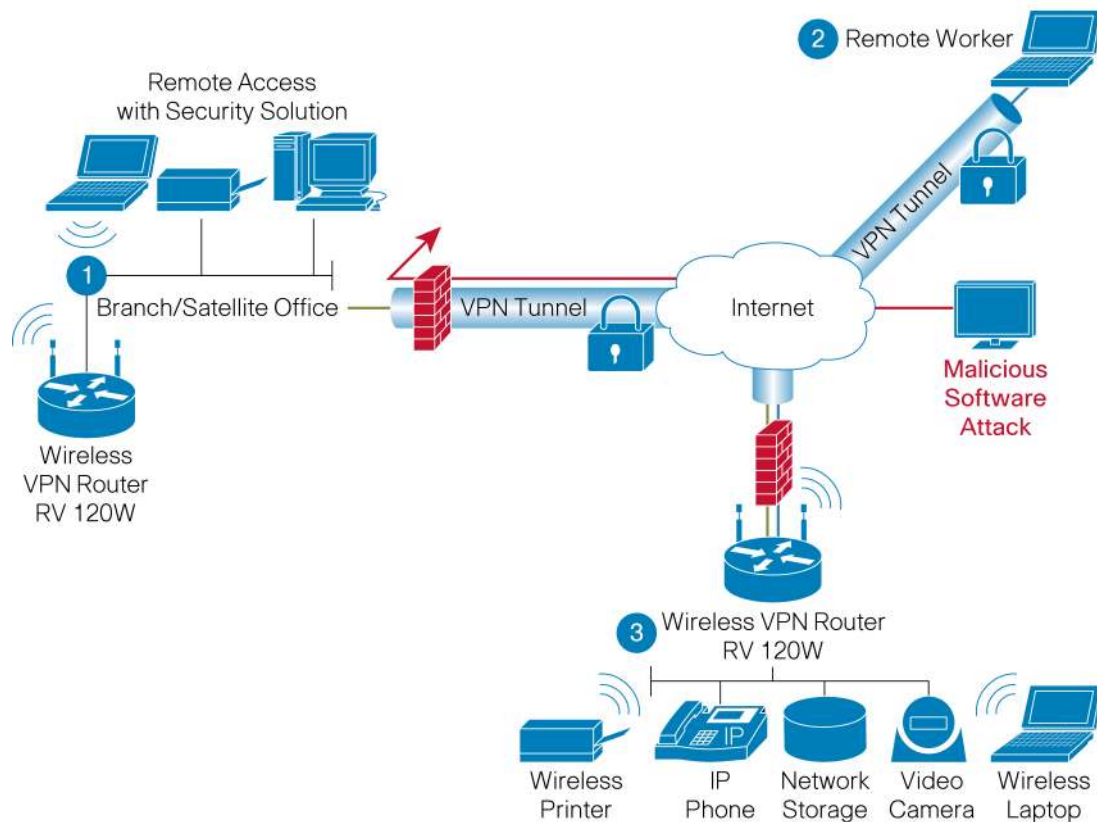

Product Specifications

Table 1 gives the product specifications for the Cisco RV120W.

Table 1. Product Specifications

Feature	Description
Routing	<ul style="list-style-type: none"> • Static routing • RIP v1 and v2 • Inter-VLAN routing
Layer 2	<ul style="list-style-type: none"> • 802.1q -based VLANs • 4 active VLANs (1 to 4094 range)
Network	<ul style="list-style-type: none"> • Dynamic Host Configuration Protocol (DHCP) server, DHCP relay agent • Point-to-Point Protocol over Ethernet (PPPoE), Point-to-Point Tunneling Protocol (PPTP), Layer 2 Tunneling Protocol (L2TP) • DNS Proxy • IGMP Proxy and multicast forwarding • Dynamic Domain Name System (DynDNS, TZO) • Network Address Translation (NAT), Port Address Translation (PAT), Network Address Port Translation (NAPT), Session Initiation Protocol Application Layer Gateway (SIP ALG), NAT traversal, one-to-one NAT • Multiple DHCP pools • Port Management
IPv6	<ul style="list-style-type: none"> • Dual-stack IPv4 and IPv6 • Multicast Listener Discovery (MLD) for IPv6 (RFC2710) • Stateless address auto-configuration • DHCP v6 • Internet Control Message Protocol (ICMP) v6
Security	<p>Access control:</p> <ul style="list-style-type: none"> • IP access control lists (ACLs) • MAC-based wireless access control <p>Firewall:</p> <ul style="list-style-type: none"> • SPI firewall • Port forwarding and triggering • DoS prevention • Software based DMZ <p>Content filtering:</p> <ul style="list-style-type: none"> • Static URL blocking or keyword blocking <p>Secure management:</p> <ul style="list-style-type: none"> • HTTPS • Username/password <p>802.1X</p> <ul style="list-style-type: none"> • Port-based RADIUS authentication (Extensible Authentication Protocol [EAP], Protected EAP [PEAP]) <p>Certificate management</p> <ul style="list-style-type: none"> • X.509 v3 certificates • Certificate upload using PEM format
VPN	<ul style="list-style-type: none"> • 10 QuickVPN tunnels for remote client access • 10 IPsec site-to-site tunnels for branch office connectivity • Triple Data Encryption Standard (3DES), Advanced Encryption Standard (AES) encryption • Message Digest Algorithm 5 (MD5)/Secure Hash Algorithm (SHA1) authentication • Dead Peer Detection (DPD) • IPsec NAT traversal • VPN pass-through of PPTP, L2TP, IPsec
Quality of Service	<ul style="list-style-type: none"> • 802.1p port-based priority on LAN port, application-based priority on WAN port • 4 queues • DiffServ support • Traffic Metering

Feature	Description
Management	<ul style="list-style-type: none"> • Simple Network Management Protocol (SNMP) versions 1, 2c and v3 • Event logging: local, syslog, email alerts • Firmware upgradable through web browser; imported/exported configuration in text format • Simple browser-based configuration (HTTP/HTTPS) • UPnP, Bonjour • Network diagnostics with packet captures
Performance	<ul style="list-style-type: none"> • NAT throughput: 95 Mbps • 1000 concurrent sessions • VPN throughput: 25 Mbps

Wireless LAN Specifications

Table 2 gives the wireless specifications for the Cisco RV120W.

Table 2. Wireless LAN Specifications

Feature	Description
WLAN hardware	<p>IEEE 802.11n standard-based access point with 802.11b/g compatibility</p> <p>Radio and modulation type:</p> <ul style="list-style-type: none"> • 802.11b: direct sequence spread spectrum (DSSS) • 802.11g/n: orthogonal frequency division multiplexing (OFDM) • 2 omnidirectional 1.8 dBi gain external antennas <p>Operating channels:</p> <ul style="list-style-type: none"> • 11 in North America • 13 in most of Europe • Automatic channel selection <p>Transmit power:</p> <ul style="list-style-type: none"> • 802.11b: 17 dBm +/- 1.5 dBm • 802.11g: 15 dBm +/-1.5 dBm • 802.11n: 12.5 dBm +/- 1.5 dBm <p>Receiver sensitivity:</p> <ul style="list-style-type: none"> • 802.11b: 11 Mbps @ -90 dBm • 802.11g: 54 Mbps @ -74 dBm • 802.11n: 270 Mbps @ -71 dBm <p>Wireless Domain Services (WDS):</p> <ul style="list-style-type: none"> • Allows wireless signals to be repeated by up to 2 compatible receivers <p>Wi-Fi Multimedia (WMM):</p> <ul style="list-style-type: none"> • WMM with QoS (802.11e) • WMM Power Save (WMM-PS)
Service Set Identifiers (SSIDs)	<ul style="list-style-type: none"> • Up to 4 separate virtual networks
Wireless VLAN	<ul style="list-style-type: none"> • Support for SSID to VLAN mapping with wireless client isolation
WLAN security	<ul style="list-style-type: none"> • Wi-Fi Protected Access (WPA2, 802.11i)

System Specifications

Table 3 gives the system specifications for the Cisco RV120W.

Table 3. System Specifications

Feature	Description
WAN	10/100 Mbps Fast Ethernet WAN port
LAN	4-port 10/100 Mbps switch with support for VLAN and QoS
WLAN	Built-in high-speed 802.11n wireless access point
Physical dimensions and weight	<ul style="list-style-type: none"> W x D x H = 5.91 in. x 5.91 in. x 1.34 in. (150 mm x 150 mm x 34 mm) Weight: 1.10 lb (0.5 kg)
Power	12V 1A
Certification	<ul style="list-style-type: none"> FCC Class B CE IC Wi-Fi
Environmental operating range	<ul style="list-style-type: none"> Operating temperature: 0° to 40°C (32° to 104°F) Storage temperature: -20° to 70°C (-4° to 158°F) Operating humidity: 10% to 85% noncondensing Storage humidity: 5% to 90% noncondensing

Configuration Requirements

Table 4 lists the configuration requirements for the Cisco RV120W.

Table 4. Configuration Requirements

Feature	Description
Network adapter	PC with network adapter and Ethernet cable
Web-based configuration	Web browser

Ordering Information

Table 5 gives ordering information for the Cisco RV120W.

Table 5. Ordering Information

Part Number	Product Name
RV120W-A-NA	Cisco RV120W Wireless-N VPN Firewall (USA)
RV120W-E-G5	Cisco RV120W Wireless-N VPN Firewall (Europe)
RV120W-N-AU	Cisco RV120W Wireless-N VPN Firewall (Australia)
RV120W-A-CN	Cisco RV120W Wireless-N VPN Firewall (China)
RV120W-A-CA	Cisco RV120W Wireless-N VPN Firewall (Canadian French)
RV120W-A-AR	Cisco RV120W Wireless-N VPN Firewall (Argentina)

Warranty Information

Find warranty information on Cisco.com at the [Product Warranties](#) page.

For More Information

For more information, visit www.cisco.com/cisco/web/solutions/small_business/products/routers_switches/small_business_routers/index.html.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

Printed in USA

C78-590161-01 03/13